

# HYNOX™ 200-15



**3000**  
PSI

**15**  
L/PM

**ELECTRIC MOTOR**  
**5.5KW 3 PHASE**  
MOTOR TYPE

**DIRECT**  
1450RPM  
DRIVE

**HOT**  
WATER  
OUTPUT



## HERO INNOVATIONS


**SSC™**  
Stainless Steel Cover

**TSI™**  
Intelligent Total Stop

**CLASS A** AS/NZS 4288  
PRESSURE CLEANER  
NO RTO CERTIFICATION REQUIRED FOR OPERATORS

## APPLICATIONS

- Food & Beverage Cleaning
- Wineries & Barrel Cleaning
- Agriculturist
- Heavy Vehicle Cleaning

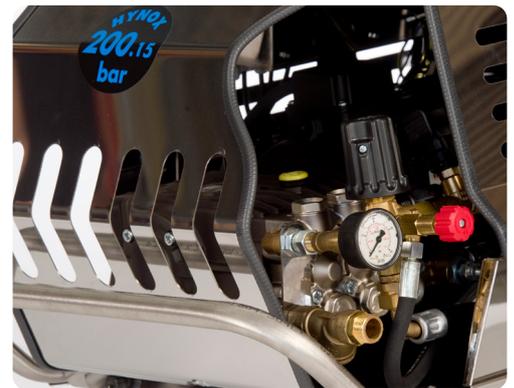

## STANDOUT FEATURES

**1450 RPM** Interpump® Italian triplex plunger pump running at 1450RPM delivers more performance and longer life.

Maintenance free low speed, electric motor, air cooled.

Jetwave Safety System™ (JSS) thermal and safety valve to prevent overheating in excessive bypass and over pressurisation.

Brass adjustable unloader valve, for user flexibility.

TSI safety features: Timed total stop, Shutdown for minor leaks, Shutdown after 1 hour of total stop, Shutdown for water supply failure, Flashing light error signalling.

Vertical 90% fuel efficient environmentally friendly V3 diesel fired hot water burner system.

## STANDARD EQUIPMENT



J5000™ High Pressure Gun + Twin Lance with Nozzles.



10m Double Wire Braid Hose with M22 Couplings.



## HYNOX™ 200-15

### TECHNICAL DATA 0:00

Product Code	10250C
Pressure / Flow Rate	3000 PSI (200 BAR) / 15 L/PM
Max Water Inlet / Outlet Temp	60°C / 90°C
Class (ASNZS: 4223)	A (3,000 Bar/Litres)
Usage Frequency	Daily - 4 Hours Daily
Nozzle Size	05
Frame Structure	Heavy gauge stainless steel with stainless steel cover

### MOTOR FEATURES

Motor / Power	Induction / 5.5kW / 3 Phase / 415v / 50Hz
Cable Length / Control	5M / Intelligent Total Stop TSI™

### HYDRAULIC FEATURES

Pump / Head / Pistons	Interpump® Italian Triplex Plunger / Brass (nickel plated) / Ceramic
Motor Pump Coupling / Pump RPM	Direct / 1450RPM
Unloader Valve	Integral - Adjustable
Safety Valve	Yes
Detergent Injector	Yes - Downstream low pressure (power boost)

### THERMAL FEATURES

Burner Model	Vertical V1
Fuel Supply / Capacity / Consumption	Diesel / 24L / 5.74 L/PH
Coil / Housing Material	Mild steel 3mm wall seamless (400BAR rated) / Stainless Steel

### DIMENSIONS & WEIGHT

Machine Dimensions / Weight	Trolley: 1000mm(L) x 610mm(W) x 830mm(H) / 160KG
-----------------------------	--

### WARRANTY(S)

Unit / Pump Warranty*	 2 Year(s)
Motor Warranty*	 2 Year(s)
Heating Coil Warranty*	 2 Year(s)

### OPTIONAL ACCESSORIES

30m Hose Reel (REQUIRES MOUNTING BRACKET)	1060CMPL
Hose Reel Mounting Bracket	90030HRP
Additional High Pressure Hose	52001
JW3 Foaming Lance w/1L Tank	JWA221
JW Bypass Profoam	PROFOAM
Turbo Head w/Lance (300BAR)	JWA160
21" Hammerhead - ABS Plastic	JWA-FSC21
21" Hammerhead - Stainless Steel	JWA-FSC21-5

The manufacturer reserves the right to modify design features and technical facts without notice, due to our principals of continuous improvement.

\*Coverage against defects in material and workmanship (refer to Jetwave's and component partners T&Cs).

V2.2 08/21